

Inverters Smart

1600 VA – 5000 VA

www.victronenergy.com



Inverter Smart
12/3000

Bluetooth built-in: fully configurable with a tablet or smartphone

- Low battery voltage alarm
- Low battery voltage cut-off and restart levels
- Dynamic cut-off: load dependent cut-off level
- Output voltage: 210 – 245 V
- Frequency: 50 Hz or 60 Hz
- ECO mode on/off and ECO mode sense level
- Alarm relay

Monitoring:

- In- and output voltage, load and alarms

VE.Direct communication port

The VE.Direct port can be connected to a computer (VE.Direct to USB interface cable needed) to configure and monitor the same parameters.

Proven reliability

The full bridge plus toroidal transformer topology has proven its reliability over many years. The inverters are short circuit proof and protected against overheating, whether due to overload or high ambient temperature.

High start-up power

Needed to start loads such as power converters for LED lamps, halogen lamps or electric tools.

ECO mode

When in ECO mode, the inverter will switch to standby when the load decreases below a preset value. Once in standby the inverter will switch on for a short period every 2,5 seconds (adjustable). If the load exceeds the preset level, the inverter will remain on.

Remote on/off

A remote on/off switch or relay contact can be connected to a two pole connector.



Alternatively, the H terminal (left) of the two pole connector can be switched to battery plus, or the L terminal (right) of the two pole connector can be switched to battery minus (or the chassis of a vehicle, for example).

LED diagnosis

Please see manual for a description.

To transfer the load to another AC source: the automatic transfer switch

For our low power inverters we recommend our Filax Automatic Transfer Switch. The Filax features a very short switchover time (less than 20 milliseconds) so that computers and other electronic equipment will continue to operate without disruption. Alternatively use a MultiPlus with built-in transfer switch.

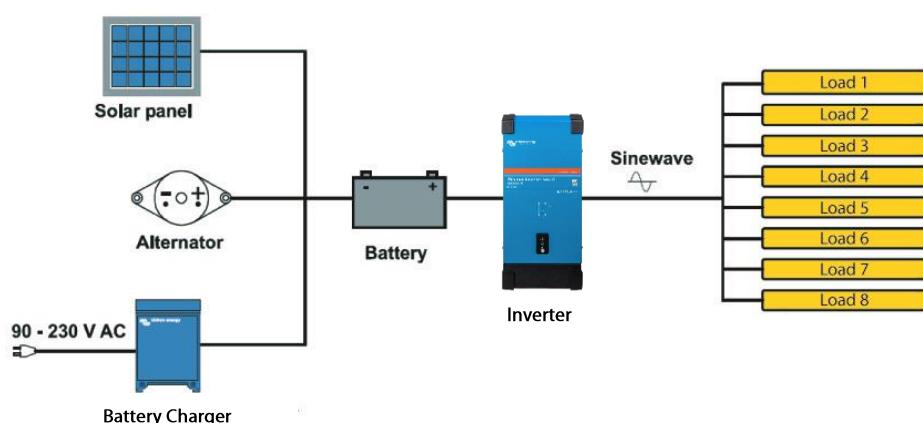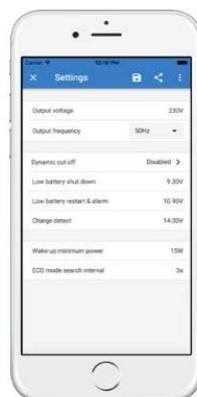

| | | | | |
|--|---|-------------------------------|---|--|
| Inverter Smart | 12/1600 24/1600 48/1600 | 12/2000 24/2000 48/2000 | 12/3000 24/3000 48/3000 | 24/5000 48/5000 |
| Parallel and 3-phase operation | No | | | |
| INVERTER | | | | |
| Input voltage range | 9.3 – 17 V 18.6 – 34 V 37.2 – 68 V | | | |
| Output | Output voltage: 230 VAC ±2 % 50 Hz or 60 Hz ±0.1 % (1) | | | |
| Cont. output power at 25 °C (1) | 1600 VA | 2000 VA | 3000 VA | 5000 VA |
| Cont. output power at 25 °C | 1300 W | 1600 W | 2400 W | 4000 W |
| Cont. output power at 40 °C | 1200 W | 1450 W | 2200 W | 3700 W |
| Cont. output power at 65 °C | 800 W | 1000 W | 1700 W | 2800 W |
| Peak power | 3000 W | 4000 W | 6000 W | 10000 W |
| Dynamic (load dependent) DC low shut down (fully configurable) | Dynamic cut-off, see https://www.victronenergy.com/live/ve.direct:phoenix-inverters-dynamic-cutoff | | | |
| Max. efficiency 12 / 24 / 48 V | 92 / 94 / 94 % | 92 / 94 / 94 % | 93 / 94 / 95 % | 95 / 96 % |
| Zero load power 12 / 24 / 48 V | 8 / 9 / 11 W | 8 / 9 / 11 W | 12 / 13 / 15 W | 18 / 20 W |
| Zero load power in ECO mode | 0.6 / 1.3 / 2.1 W | 0.6 / 1.3 / 2.1 W | 1.5 / 1.9 / 2.8 W | 2.2 / 3.2 W |
| GENERAL | | | | |
| Programmable relay (2) | Yes | | | |
| Stop & start power ECO-mode | adjustable | | | |
| Protection (3) | a - g | | | |
| Bluetooth wireless communication | For remote monitoring and system integration | | | |
| VE.Direct communication port | For remote monitoring and system integration | | | |
| Remote on-off | Yes | | | |
| Common Characteristics | Operating temperature range: -40 to +65 °C (fan assisted cooling) Humidity (non-condensing): max 95 % | | | |
| ENCLOSURE | | | | |
| Common Characteristics | Material & Colour: steel (blue RAL 5012; and black RAL 9017) Protection category: IP21 | | | |
| Battery-connection | M8 bolts | M8 bolts | 12 V/24 V: 2+2 M8 bolts 48 V: M8 bolts | 24 V: 2+2 M8 bolts 48 V: M8 bolts |
| 230 VAC-connection | Screw terminals | | | |
| Weight | 12 kg | 13 kg | 19 kg | 29 kg / 28 kg |
| Dimensions (hxwxd) | 485 x 219 x 125 mm | 485 x 219 x 125 mm | 533 x 285 x 150 mm (12 V) 485 x 285 x 150 mm (24V/48V) | 595 x 295 x 160 mm (24 V) 555 x 295 x 160 mm (48 V) |
| STANDARDS | | | | |
| Safety | EN 60335-1 | | | |
| Emission Immunity | EN 55014-1 / EN 55014-2 / EN-IEC 61000-6-1 / EN-IEC 61000-6-2 / EN-IEC 61000-6-3 | | | |
| Automotive Directive | ECE R10-5 | | | |
| 1) Non-linear load, crest factor 3:1 2) Programmable relay that can a.o. be set for general alarm, DC undervoltage or genset start/stop function. AC rating: 230V / 4 A DC rating: 4 A / 35 VDC, 1 A / 60 VDC | 3) Protection key: a) output short circuit b) overload c) battery voltage too high d) battery voltage too low e) temperature too high f) 230 VAC on inverter output g) input voltage ripple too high | | | |



Inverter Control

This panel is intended for remote on/off control of all InvertersSmart units.



Ekrano GX or Cerbo GX

Provides intuitive system control and monitoring and enables access to our free remote monitoring website: the VRM Online Portal.



VE.Direct to USB interface

Connects to a USB port.



Bluetooth wireless communication

Connects to a smart phone (both iOS and Android).



BMV-712 Smart Battery Monitor

The BMV Battery Monitor features an advanced microprocessor control system combined with high resolution measuring systems for battery voltage and charge/discharge current. Besides this, the software includes complex calculation algorithms, like Peukert's formula, to exactly determine the state of charge of the battery. The BMV selectively displays battery voltage, current, consumed Ah or time to go. The monitor also stores a host of data regarding performance and use of the battery.